

INSTALLATION INSTRUCTIONS

** Installation recommendation: JBA recommends in most case that the vehicle be taken to a reputable exhaust shop for installation.

40-2646

2015 Mustang 5.0 GT
3" Dual exhaust to JBA Long Tube
#6689S

**NOTE: This Exhaust will ONLY work With
JBA Long Tube Closed Course Competition Headers**



This product is Not legal for Street or Off Highway use in California or in states that have adopted California Emissions Regulations and is only intended for Closed Course Competition use, except 1965 and Older US manufactured California Certified vehicles, 1967 or older US manufactured Federally Certified vehicles, or 1967 and older Foreign manufactured vehicles which may have any aftermarket add-on or modified part installed as long as the vehicle can still meet the tailpipe emission standards for the year of the vehicle and retain any original or retrofit crankcase control (PCV) devices and NOx device required for the year of the vehicle.


1. Remove and inventory the JBA Exhaust System.
2. Disconnect the negative battery cable and allow the exhaust system to completely cool.
3. Raise car a minimum of 24" off the ground - A lift is the preferred method.
4. The middle section of the exhaust and mufflers are one unit and need to be removed as one. At the front there are two clamps that attach the mid section to the cat pipes. Loosen the clamps and slide them backwards (see picture below). At the mufflers you need to slide the hangars from the rubber mounts.
5. Instal the JBA Long Tuber Headers per instructions.
6. Offer the JBA X-Pipe up to the Long Tube headers using the V band clamps.
7. Install the JBA mufflers onto the rubber hangers WD 40 will ease installation.
8. Slide the JBA Muffler over the end of the JBA X-Pipe with the 3" Accu Seal Clamps.
9. With the axle pipes in the muffler assemblies adjust mufflers to be flat, and the tips an equal distance from the bumper cover, Then tighten all clamps securely.
10. Using a soft cloth, wipe the new JBA tips clean.
11. Reconnect the battery and start the vehicle to check for leaks.

To get more power out of your Mustang, JBA offers Cat4Ward and long tube headers and for the 5.0L. For more information about these and other quality performance products from JBA visit us online at www.jbaheaders.com



NOTES:

- 1.) All exhaust systems expand about 1" rearward when exhaust temperature rises so keep this in mind when adjusting your system.

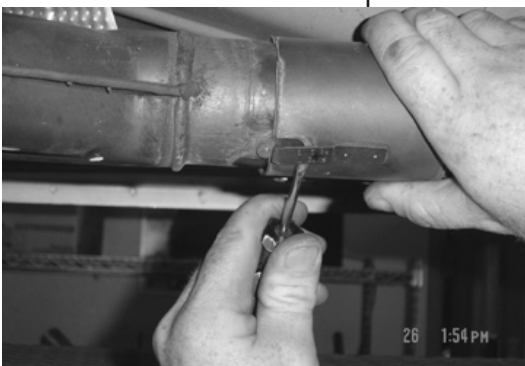

Parts List:

- 1 X-Pipe
- 1 Driver's Side Muffler
- 1 Pass Side Muffler
- 2 3" Accu Seal Clamps

Recommended Tools:

- Pry bar
- Ratchet
- 15mm deep socket
- 9/16 deep socket
- Channel lock pliers
- 7/16" socket or End Wrench